

The 702 “Syntropy” Elevation Table By Lloyd



Specs: Special *7 degrees of incline from foot to head**

Hydraulic Lift System:


The Lloyd 702 Elevation table is built using a GE motor coupled with a M&W hydraulic pump system to create one of the best lifting systems in the world, with a lifting capacity of 600 pounds. It has a height range of 19” to 38” to accommodate multiple physician clinics.

Cushion Foam & Upholstery:


We use a higher density foam produced by Acuity Foam that is based on durability, especially in the wear parts on our tables (Chest and Pelvic). We have chosen to use the Naugahyde line of vinyl, which has a proven track record of durability and is long lasting, even in the busiest of practices.

Cushion mounting:

Lloyd cushions are mounted to the table frame(s) by use of “T-Nuts” which are designed for durability and a greater fastening ability....cushions are not just “lagged-in” with wood screws.

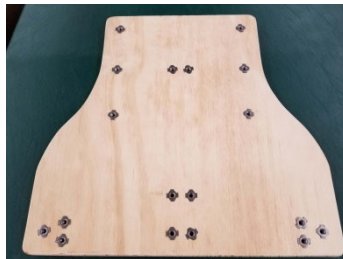

Drop System:

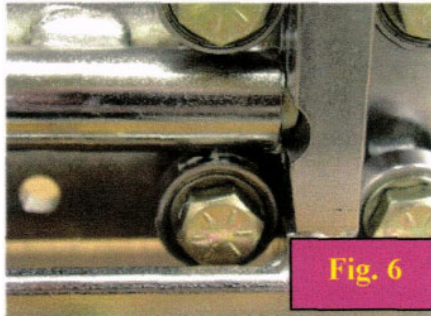

The tension mechanism which is the horizontal tube contains a spring and ball bearing. The bearing rides in the notch of the wedge or "T" type of drop mechanism. The tension is applied by turning the knob into the tube that increases the tension of the ball bearing in the notch (Fig.6)... this is what governs the variation of pressure needed to set the drop according to the weight of the patient. This precise control is the basis for achieving the proper adjustment.

The Lloyd "T-Bar" drop is attached to the base of the cushion. By the very nature of the width of the "T" attachment it will provide a controlled drop with the thrust even out to the edge of the cushion. These modifications have improved the quality of the adjusting process in utilizing a low force adjustment.

STANDARD FEATURES:

- Special 7 degrees of incline from foot to head
- Adjustable Width Tilting Headpiece
- Adjustable Chest & Pelvic to Accommodate Pregnant & Large Abdominal Patients
- Total Drop System *TM*

OPTIONAL FEATURES:

- Straight Drop Head
- Pelvic/Lumbar Drop, Automatic & Hand Cocking
- Spring Breakaway Chest
- Adjustable Ankle Rest (Vertical & Horizontal)
- EHA (Electronic Height Adjustment)

Other Info:

Height Range 19" to 38"

Foam 3" Firm

Length - Extended 75 Inches

Length - Retracted 62 Inches

Voltage: 110 volts

Amperage Draw: 5.5 amps

Frequency: 60 hertz

Table Width 22 Inches

We also make a non-electric Pump Elevation & a Stationary & a Bench table with the *Total Drop System*

The 701 “Syntropy” Drop Bench Table



STANDARD FEATURES:

- Special 7 degrees of incline from foot to head
- Adjustable Width Tilting Headpiece
- Total Drop System *TM*

Other Info:

Height Range 18” to 26”

Foam 3” Firm

Length - Extended 75 Inches

Length - Retracted 62 Inches

Table Width 22 Inches

The 702 “Syntropy” Pump Elevation Table



The 702 “Syntropy” Stationary Table

